

FINEDARER

PNEUMATIC INDUSTRIAL TOOLS

PRECISION RIVETING & GRINDING SOLUTIONS

BUILT FOR PERFORMANCE.
DESIGNED FOR RELIABILITY.

PROFESSIONAL TOOLS FOR AEROSPACE & INDUSTRY

Engineered for demanding applications.
Trusted by professionals worldwide.



TAIWAN
MANUFACTURING
EXCELLENCE



OEM / ODM
SERVICE



QUALITY
ASSURANCE



GLOBAL
EXPORT



MADE IN TAIWAN
TRUSTED BY PROFESSIONALS WORLDWIDE

www.finedarer.com

TABLE OF CONTENTS

2026



RIVET HAMMERS
BUCKING BARS
RH BOX

1-4



VIBRATION DAMPED
RIVETING HAMMERE

VIBRATION DAMPED
BUCKING BARE

5



CHIPPER HAMMERSE

6-7



FLUX CHIPPER / NEEDLE SCALERS
LOW VIBRATIONE
FLUX CHIPPERS / NEEDLE SCALERS

8

TABLE OF CONTENTS

2026



SAND RAMMERE

9



ONE SHOT HAMMER

10



DIE GRINDERS
ANGLE GRINDERS (2")
ANGLE GRINDERS (4",5",7")
VERTICAL GRINDERS
STRAIGHT GRINDERSE

10-12



[L] TYPE OFFSET DRILL ATTACHMENT

13

RIVET HAMMERS



Push-button

Throttle Type



RH-9501XS(0.86kg)
RH-9502XS(1.06kg)
RH-9503XS(1.16kg)
RH-9504XS (1.27kg)

Level

Throttle Type



RH-9501 XSL (0.86 kg)
RH-9502 XSL (1.06 kg)
RH-9503 XSL (1.16 kg)
RH-9504 XSL (1.27 kg)

XG Extended Body

Handle Type



RH-9502 XG (2.06 kg)
RH-9503 XG (2.16 kg)
RH-9504 XG (2.19 kg)

Longer overall length for deeper reach

Standard

Handle Type



RH-9501X (1.06 kg)
RH-9502X (1.26 kg) / RH-9502P (1.26 kg)
RH-9503X (1.36 kg) / RH-9503P (1.36 kg)
RH-9504X (1.39 kg) / RH-9504P (1.39 kg)

Adjustable air flow

Handle Type



RH-9501 XA (1.06 kg)
RH-9502 XA (1.26 kg) / RH-9502 PA (1.26 kg)
RH-9503 XA (1.36 kg) / RH-9503 PA (1.36 kg)
RH-9504 XA (1.39 kg) / RH-9504 PA (1.39 kg)


TECHNICAL SPECIFICATIONS

All models: Air inlet 1/4 PT /Air hose 9.5 ID


Model	Chisel Shank (inch)	Bore Diameter		Piston Stroke		Blow Per Min (B.P.M)	Overall Length		Air Inlet (PT)	Air Hose (ID)	Rivet Nuts		Max. Air consumption	
		MM	INCH	MM	INCH		MM	INCH			Steel	Alum	CFM	L/min
RH-9501X	0.401	14.3	9/16	35	1-3/8	2850	115	4.49	1/4	9.5	3/32	1/8	4	114
RH-9501XS	0.401	14.3	9/16	35	1-3/8	2850	160	6.3	1/4	9.5	3/32	1/8	4	114
RH-9502X	0.401	12.7	1/2	59.8	2-1/4	2580	170	6.63	1/4	9.5	3/32	1/8	4	114
RH-9502XS	0.401	12.7	1/2	59.8	2-1/4	2580	215	8.39	1/4	9.5	3/32	1/8	4	114
RH-9502XSL	0.401	12.7	1/2	59.8	2-1/4	2580	197.5	7.77	1/4	9.5	3/32	1/8	4	114
RH-9502XG	0.401	12.7	1/2	59.8	2-1/4	2580	260	10.23	1/4	9.5	3/32	1/8	4	114
RH-9502P	0.401	14.3	9/16	59.8	2-1/4	2580	170	6.63	1/4	9.5	3/32	1/8	4	114
RH-9503X	0.401	12.7	1/2	76.3	2-7/8	2160	186	7.25	1/4	9.5	5/32	3/16	4	114
RH-9503XS	0.401	12.7	1/2	76.3	2-7/8	2160	231	9	1/4	9.5	5/32	3/16	4	114
RH-9503XSL	0.401	12.7	1/2	76.3	2-7/8	2160	220	8.66	1/4	9.5	5/32	3/16	4	114
RH-9503XG	0.401	12.7	1/2	76.3	2-7/8	2160	280	11.02	1/4	9.5	5/32	3/16	4	114
RH-9503P	0.401	14.3	9/16	76.3	2-7/8	2160	186	7.25	1/4	9.5	5/32	3/16	4	114
RH-9504X	0.401	12.7	1/2	96.8	3-1/16	1740	211	8.22	1/4	9.5	3/16	1/4	4	114
RH-9504XS	0.401	12.7	1/2	96.8	3-1/16	1740	256	9.98	1/4	9.5	3/16	1/4	4	114
RH-9504XSL	0.401	12.7	1/2	96.8	3-1/16	1740	240	9.44	1/4	9.5	3/16	1/4	4	114
RH-9504XG	0.401	12.7	1/2	96.8	3-1/16	1740	300	11.81	1/4	9.5	3/16	1/4	4	114
RH-9504P	0.401	14.3	9/16	96.8	3-1/16	1740	211	8.22	1/4	9.5	3/16	1/4	4	114

RIVET HAMMERS


Hammer Chisel FOR:RH-9501X




YM719




YM720



YM721



YM722




YM723




R-851006


Hammer Chisel FOR:RH-9502X~RH-9504X




YM901




YM902



YM903



YM904



YM905




R-852020




R-852019




QC-9504




YM906




YM907



YM908



YM909



YM910

RIVET HAMMERS




RH-9505X(2.1kg)
RH-9507X(2.4kg)
RH-9509X(2.5kg)




RH-9505XG (3.3kg)
RH-9507XG (3.6kg)
RH-9509XG (3.7kg)

Model	Chisel Shank (inch)	Bore Diameter		Piston Stroke		Blow Per Min (B.P.M)	Overall Length		Air Inlet (PT)	Air Hose (ID)	Rivet Nuts		Max. Air consumption	
		MM	INCH	MM	INCH		MM	INCH			Steel	Alum	CFM	L/min
RH-9505X	0.498	19	3/4	68.3	2-11/16	1600	230	8.97	1/4	9.5	3/16	1/4	6	170
RH-9505XG	0.498	19	3/4	68.3	2-11/16	1600	315	12.4	1/4	9.5	3/16	1/4	6	170
RH-9507X	0.498	19	3/4	98.4	3-7/8	1140	256	9.98	1/4	9.5	1/4	5/16	6	170
RH-9507XG	0.498	19	3/4	98.4	3-7/8	1140	340	13.38	1/4	9.5	1/4	5/16	6	170
RH-9509X	0.498	19	3/4	147.6	5-13/16	900	284	11.07	1/4	9.5	5/16	3/8	6	170
RH-9509XG	0.498	19	3/4	147.6	5-13/16	900	390	15.35	1/4	9.5	5/16	3/8	6	170


Hammer Chisel FOR:RH-9505X~RH-9509X




YM701




YM702




YM703




YM704



YM705



YM706



YM707



R-853012



R-853011



QC-9509


BUCKING BARS

We adopt superior 4140 material to produce Bucking Bars, and the Bucking Bars are finished by casting method, the hardness of heat treatment: HRC46°~50°. Electro deposited coating. All sharp edges are deburred and working surfaces are polished for trouble-free use.

BUCKING BARS



BB-670T



BB-638



BB-647



BB-1112

RH BOX KITS

RH BOX KIT



RH BOX

THE RH BOX contains:

- 1PC RIVET GUN(CHOOSE SIZE 2X,3X OR 4X)
- 1PC BB-670T-BUCKING BAR
- 1PC BB-638-BUCKING BAR
- 1PC BB-647-BUCKING BAR
- 1PC BB-1112-BUCKING BAR
- 6PCS 3.5" RIVET SET
(3/32",1/8",5/32",3/16",1/4",1")
- 1PC QC-9504

VIBRATION DAMPED RIVETING HAMMER



VRH-04(1.2kg)



VRH-06(1.48kg)



VRH-08(1.58kg)

Model	Chisel Shank (inch)	Bore Diameter MM	Piston Stroke MM	Blow Per Min (B.P.M)	Overall Length MM	Air Inlet (PT)	Air Hose (ID)	Rivet Nuts Steel	Air Consumption CFM	Energy Per Blow J	Vibration Value m/s	Sound power dB
VRH-04	0.401	15	40	3960	200	1/4	9.5	2/32-5/32	6	2	<2.5	104
VRH-06	0.401	15	102	2160	260	1/4	9.5	1/8-1/4	19	6	3.9	103
VRH-08	0.401	15	137	1440	290	1/4	9.5	5/32-1/4	21	8	4.8	103

VIBRATION DAMPED BUCKING BAR

The VBB Bucking Bar is the perfect partner for the VRH riveting hammer.

With its efficient vibration damping system the tool works well with the riveting hammer providing a high efficiency riveting team.



Model VBB-10

Weight 1.1 kg

Diameter 48mm



Model VBB-16

Weight 1.7 kg

Diameter 48mm

CHIPPER HAMMERS



CH-4000 (2.62kg)



CH-4001 (6.87kg)



CH-4003 (7.54kg)



CH-4000A (2.63kg)



CH-4002 (7.2kg)



CH-4004 (8.3kg)

Model	Chisel Shank				Piston Diameter	Piston Stroke Length		Blow Per Min (B.P.M)	Overall Length		Air Inlet	Air Hose	Max. Air Consumption
	Round	Hex				mm	in		mm	in			
CH-4000	14	0.55	12	0.47	20	45	1-3/4	3000	300	11-13/16	1/4"	3/8"	14 CFM
CH-4000A	14	0.55	12	0.47	20	45	1-3/4	3000	300	11-13/16	1/4"	3/8"	14 CFM
CH-4001	17.3	0.68	14.7	0.58	28.5	25.4	1	2100	375	14-9/16	3/8"	1/2"	21 CFM
CH-4002	17.3	0.68	14.7	0.58	28.5	50	2	1900	400	15-3/4	3/8"	1/2"	21 CFM
CH-4003	17.3	0.68	14.7	0.58	28.5	76	3	1700	420	16-17/32	3/8"	1/2"	24 CFM
CH-4004	17.3	0.68	14.7	0.58	28.5	102	4	1400	470	18-1/2	3/8"	1/2"	28 CFM



MCH-4001(7.69kg)



MCH-4002 (8.04kg)



MCH-4003 (8.5kg)




MCH-4004 (8.88kg)


Model	Chisel Shank				Piston Diameter	Piston Stroke Length		Blow Per Min (B.P.M)	Overall Length		Air Inlet	Air Hose	Max. Air Consumption
	Round	Hex				mm	in		mm	in			
MCH-4001	17.3	0.68	14.7	0.58	28.5	60	2.16	2500	345	13-1/2	3/8"	1/2"	32 cfm
MCH-4002	17.3	0.68	14.7	0.58	28.5	77	3.03	2300	365	14	3/8"	1/2"	34 cfm
MCH-4003	17.3	0.68	14.7	0.58	28.5	94	3.7	2100	400	15-1/4	3/8"	1/2"	33 cfm
MCH-4004	17.3	0.68	14.7	0.58	28.5	102	4.02	1750	425	16-1/2	3/8"	1/2"	30 cfm

CHIPPER HAMMERS

FOR:CH-4000,CH-4000A

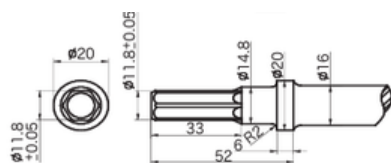


Φ16mm六角型/Hex.11.8mm

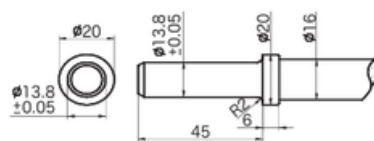


Φ16mm圓型/Round 13.8mm


Moil Point
YM101




16mm Wide Cutting Chise
YM102




20mm Wide Cutting Chisel
YM103




30mm Wide Cutting Chisel
YM104




40mm Wide Cutting Chisel
YM105




50mm Wide Cutting Chise
YM106




25mm Wide Cutting Chisel
YM107




100mm Moon-shaoe Chisel
YM108



FOR:CH-4001~CH4004 & MCH-4001~MCH-4004



Φ20mm六角型/Hex. 14.7mm (橢圓唇)

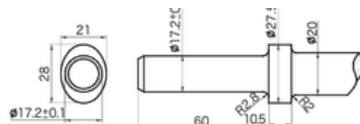


Φ20mm圓型/Round. 17.2mm (橢圓唇)




QC-4004


Moil Point
YM201




20mm Wide Cutting Chisel
YM202




30mm Wide Cutting Chisel
YM203




50mm Wide Cutting Chisel
YM204




25mm Wide Cutting Chisel
YM205




40mm Wide Cutting Chisel
YM206



100mm Moon-shaoe Chisel
YM208



FLUX CHIPPERS /NEEDLE SCALERS

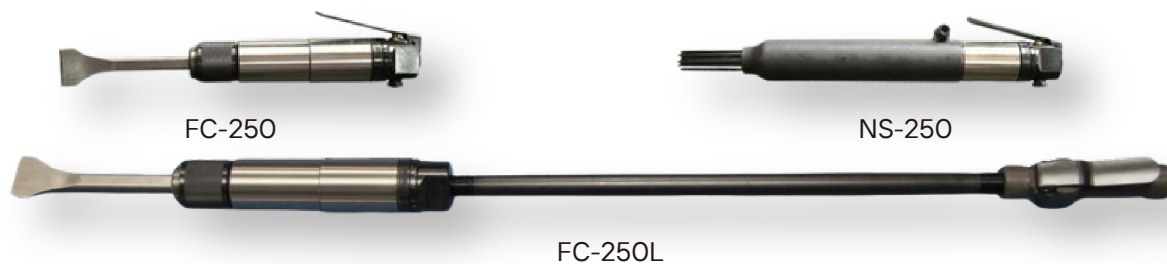

Model	Speed B.P.M	Piston Diameter		Stroke		Overall Length		Weight kg	Air Hose Size		Air Inlet PT or NPT	Air Consumption	
		mm	in	mm	in	mm	in		mm	in		CFM	m³/min
FC-250	4,000	25	63/64	34	1-11/32	190	7-1/2	1.5	9.5	3/8	1/4	14	0.4
NS-250	4,000	25	63/64	34	1-11/32	413	16-1/4	2.6	9.5	3/8	1/4	14	0.4
FC-250L	4,000	25	63/64	34	1-11/32	730	28-3/4	1.5	12.7	1/2	1/2	14	0.4

LOW VIBRATION FLUX CHIPPERS /NEEDLE SCALERS



Model	Speed B.P.M	Piston Diameter		Strok		Overall Length		Weight (kg)	Air Hose Size		Air Inlet PT or NPT	Air consumption	
		mm	in	mm	in	mm	in		mm	in		CFM	m³/min
VNS-223	2400	23.5	59/64	11	7/16	370	14-9/16	2.35	9.5	3/8	1/4	4	0.11
VFC-223	2400	23.5	59/64	11	7/16	435	17-1/8	2.95	9.5	3/8	1/4	4	0.11



Model	Speed B.P.M	Piston Diameter		Strok		Overall Length		Weight (kg)	Air Hose Size		Air Inlet PT or NPT	Air consumption	
		mm	in	mm	in	mm	in		mm	in		CFM	m³/min
VNS-203	2400	23.5	59/64	11	0.43	340	13-3/8	2.7	9.5	3/8	1/4	4	0.11
VFC-203	2400	23.5	59/64	11	0.43	395	15-9/16	3.2	9.5	3/8	1/4	4	0.11

SAND RAMMER



SR-301



SR-302



SR-303



SR-302L



SR-303L



SR-304L

Model	Speed	Piston Diameter	Stroke	Overall Length		Weight	Air Inlet		Air Hose Size		Air Consumption	
	B.P.M			mm	in		PT		mm	in	CFM	m ³ /min
SR-301	1,500	18	50	280~360	11~14-1/4	1.6	1/4		9.5	3/8	14	0.4
SR-302	1,000	22	65	380~470	14-1/2~18-1/2	2.95	3/8		9.5	3/8	17	0.5
SR-302L	1,000	22	65	870~980	34-1/4~38-1/2	3.75	3/8		9.5	3/8	17	0.5
SR-303	800	25.4	100	500~660	19-11/16~26	6	3/8		9.5	3/8	24	0.7
SR-303L	800	25.4	100	1060~1210	41-47/64~47-5/8	8	1/2		12.7	1/2	24	0.7
SR-304L	700	32	125	1080~1250	42-1/2~49-1/4	9.79	1/2		12.7	1/2	30	0.85

ONE SHOT HAMMER

One shot hammer for delicate operations requiring lower power, including the insertion of pins, bushings, collar caps, oil seals, etc. Each lever pull delivers a single blow of precise power.



MODEL	ORH-20
Power	2.25 N-m
Length	213 mm
Weight	0.9 kg
Air inlet	1/4"
Avg. Air Consumption	220 cm ³ /stroke



MODEL	ORH-80
Power	3.13 N-m
Length	254 mm
Weight	1.2 kg
Air inlet	1/4"
Avg. Air Consumption	650 cm ³ /stroke

DIE GRINDERS



FY-26A



FY-26B

Model	Throttle Type	Collet Size		Capacity Grinding Wheel Burr Head				Free Speed	Air Hose Size		Overall Length		Weight (kg)	HP	Max. Air Consumption	
		mm	in	mm	in	mm	in		mm	in	mm	in			CFM	m ³ /min
FY-26A	Roll	6	1/4	25	1	13	1/2	24,000	8	5/16	170	6-11/16	0.66	0.4	14	0.4
FY-26B	Lever	6	1/4	25	1	13	1/2	24,000	8	5/16	179	7-3/64	0.77	0.4	14	0.4

ANGLE GRINDERS



AG-102A



AG-102B

Model	Throttle Type	Grinding Wheel		Free Speed	Spindle Thread Size	Angle Head Height		Overall Length		Weight (kg)	HP	Max. Air Consumption	
		mm	in			mm	in	mm	in			CFM	m ³ /min
AG-102A	Roll	50	2	15,000	1/4-28 UNF	46	3	157	6-3/16	0.66	0.35	14	0.4
AG-102B	Lever	50	2	15,000	1/4-28 UNF	46	3	188	7-13/32	0.74	0.35	14	0.4

ANGLE GRINDERS



AG-104AF (3/8 x 24UNF)
AG-104AM (M8 x 1.25P)
AG-105AC (5/8 x 11UNC)
AG-105AF (3/8 x 24UNF)
AG-105AM (M8 x 1.25P)
AG-105AP (M14 x 2.0P)



AG-104BF (3/8 x 24UNF)
AG-104BM (M8 x 1.25P)
AG-105BC (5/8 x 11UNC)
AG-105BF (3/8 x 24UNF)
AG-105BM (M8 x 1.25P)
AG-105BP (M14 x 2.0P)



AG-107AC (5/8 x 11UNC)
AG-107AN (M10 x 1.5P)
AG-107AP (M14 x 2.0P)



AG-109AC (5/8 x 11UNC)
AG-109AN (M10 x 1.5P)
AG-109AP (M14 x 2.0P)



AG-105ACB (5/8 x 11UNC)
(Steel Brush)



AG-105BCB (5/8 x 11UNC)
(Steel Brush)



AG-107BC (5/8 x 11UNC)
AG-107BN (M10 x 1.5P)
AG-107BP (M14 x 2.0P)



AG-109BC (5/8 x 11UNC)
AG-109AN (M10 x 1.5P)
AG-109AP (M14 x 2.0P)

Model	Throttle Type	Grinding Wheel		Free Speed	Spindle Thread Size	Angle Head Height		Overall Length		Weight (kg)	HP	Max. Air Consumption	
		mm	in			mm	in	mm	in			CFM	m³/min
AG-104AF	Roll	100	4	13,600	3/8 x 24 UNF	76	3	208	8-3/16	2	0.9	33	0.95
AG-104AM	Roll	100	4	13,600	M8 x 1.25P	76	3	208	8-3/16	2	0.9	33	0.95
AG-104BF	Lever	100	4	13,600	3/8 x 24 UNF	76	3	246	9-11/16	1.7	0.9	33	0.95
AG-104BM	Lever	100	4	13,600	M8 x 1.25P	76	3	246	9-11/16	1.7	0.9	33	0.95
AG-105AF	Roll	125	5	10,900	3/8 x 24 UNF	76	3	208	8-3/16	1.8	0.9	33	0.95
AG-105AM	Roll	125	5	10,900	M8 x 1.25P	76	3	208	8-3/16	1.8	0.9	33	0.95
AG-105AC	Roll	125	5	10,900	5/8 x 11 UNC	76	3	208	8-3/16	1.8	0.9	33	0.95
AG-105AP	Roll	125	5	10,900	M14 x 2.0P	76	3	208	8-3/16	1.8	0.9	33	0.95
AG-105BF	Lever	125	5	10,900	3/8 x 24 UNF	76	3	246	9-11/16	1.6	0.9	33	0.95
AG-105BM	Lever	125	5	10,900	M8 x 1.25P	76	3	246	9-11/16	1.6	0.9	33	0.95
AG-105AC	Lever	125	5	10,900	5/8 x 11 UNC	76	3	208	8-3/16	2.1	0.9	33	0.95
AG-105BP	Lever	125	5	10,900	M14 x 2.0P	76	3	208	8-3/16	2.1	0.9	33	0.95
AG-105ACB	Roll	-	-	6,000	5/8 x 11 UNC	98	3-55/64	208	8-3/16	1.4	0.9	33	0.95
AG-105BCB	Lever	-	-	6,000	5/8 x 11 UNC	98	3-55/64	246	8-3/16	1.4	0.9	33	0.95
AG-107AC	Roll	180	7	7,600	5/8 x 11 UNC	87	3-27/64	253	10	4.05	2	56	1.6
AG-107AN	Roll	180	7	7,600	M10 x 1.5P	87	3-27/64	253	10	4.05	2	56	1.6
AG-107AP	Roll	180	7	7,600	M14 x 2.0P	87	3-27/64	253	10	4.05	2	56	1.6
AG-107BC	Lever	180	7	7,600	5/8 x 11 UNC	87	3-27/64	300	11-13/16	3.79	2	56	1.6
AG-107BN	Lever	180	7	7,600	M10 x 1.5P	87	3-27/64	300	11-13/16	3.79	2	56	1.6
AG-107BP	Lever	180	7	7,600	M14 x 2.0P	87	3-27/64	253	10	3.79	2	56	1.6
AG-109AC	Roll	230	9	5,900	5/8 x 11 UNC	115	4-1/2	280	11	4.32	2.5	67	1.9
AG-109AN	Roll	230	9	5,900	M10 x 1.5P	115	4-1/2	280	11	4.32	2.5	67	1.9
AG-109AP	Roll	230	9	5,900	M14 x 2.0P	115	4-1/2	280	11	4.32	2.5	67	1.9
AG-109BC	Lever	230	9	5,900	5/8 x 11 UNC	115	4-1/2	310	12-13/64	4.06	2.5	67	1.9
AG-109BN	Lever	230	9	5,900	M10 x 1.5P	115	4-1/2	310	12-13/64	4.06	2.5	67	1.9
AG-109BP	Lever	230	9	5,900	M14 x 2.0P	115	4-1/2	310	12-13/64	4.06	2.5	67	1.9

Guide to Model Ref.

AG-104 A F — Spindle Type (F=3/8 x 24UNF ; C=5/8 x 11UNC ; M=M8 x 1.25P ; N=M10 x 1.5P ; P=M14 x 2.0P)

Throttle Type (A=Roll ; B=Lever)

Grinder Wheel (4=4 inch ; 5=5 inch ; 7=7 inch)

VERTICAL GRINDERS



VG-5BH-1M



VG-7BH-2MC (5/8-11UNC)
VG-7BH-2MP (M14 X 2.0P)
VG-7BH-4MC (5/8-11UNC)
VG-7BH-4MP (M14 X 2.0P)



VG-9BH-1M
VG-9BH-2M



VG-9BH-3M
VG-9BH-4M

Model	Grinding Wheel mm	Max. Dia Cup Wheel mm	Cutting Disc mm	Height mm in	Free Speed R.P.M	Overall Length mm in	Weight	Air Hose Size mm in	HP	Max Air Consumption CFM m³/min
VG-5BH-1M	125 x 6 x 22.2			174 6-27/32	12,000	232 9-9/64	2.8	12.7 ½	1.4	42.4 1.2
VG-7BH-2M	180 x 6 x 22.2		180 x—x 22.2	192 7-9/16	7,000	247 9-23/32	4	12.7 ½	2	56.5 1.6
VG-7BH-4M	180 x 6 x 22.2			192 7-9/16	8,400	247 9-23/32	4	12.7 ½	2	56.5 1.6
VG-9BH-1M	230 x 10 x 22.2			204 8-1/32	6,000	279 10-63/64	5.8	19 3/4	4	98.9 2.8
VG-9BH-2M	230 x 10 x 22.2		230 x—x 22.2	204 8-1/32	4,500	279 10-63/64	5.8	19 3/4	3.8	87.7 2.4
VG-9BH-3M		150 x 50 x 22.2		222 8-47/64	6,000	279 10-63/64	5.9	19 3/4	4	98.9 2.8
VG-9BH-4M		150 x 50 x 22.2		222 8-47/64	4,500	279 10-63/64	5.9	19 3/4	3.8	87.7 2.4

STRAIGHT GRINDERS



SG-105A
SG-106A



SG-105B
SG-106B



SG-206B




SG-306B

Model	Throttle Type	Grinding Wheel mm in	Free Speed	Spindle Thread Size	Overall Length mm in	Weight (kg)	HP	Air Hose Size	Air Inlet Thread Size	Max. Air Consumption SCFM
SG-105A	Roll	125 X 19 X 12.7 5 X 3/4 X ½	7,600	½ x 12	400 3/4	2.97	1.3	12.7	3/8	20
SG-105B	Lever	125 X 19 X 12.7 5 X 3/4 X ½	7,600	½ x 12	501 11/16	2.97	1.3	12.7	3/8	20
SG-106A	Roll	150 X 25 X 15.8 6 X 1 X 5/8	6,900	5/8 x 11	425 16-47/64	4.14	1.4	12.7	3/8	24
SG-106B	Lever	150 X 25 X 15.8 6 X 1 X 5/8	6,300	5/8 x 11	521 20-33/64	4.14	1.4	12.7	3/8	24
SG-206B	Lever	150 X 25 X 22 6 X 3/32 X 7/8	6,300	5/8 x 11	510 20	4.14	1.4	12.7	3/8	24
SG-306B	Lever	5/8" Cone Wheel	6,300	5/8 x 11	510 20	3.27	1.4	12.7	3/8	24

[L] TYPE OFFSET DRILL ATTACHMENT

- Fits Any 1/4" Drill Chuck (Air Or Electric)
- 1/4" x 28 Female Threaded Spindle Standard

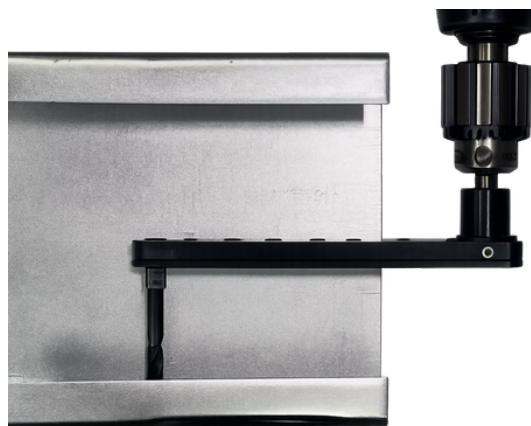



芳宇達有限公司



Tel: 886-3-3613535 886-3750279



Fax: 886-3-3750280



Email: finedarer20@gmail.com



Web: finedarer.com