

## TECHNICAL SPECIFICATION

|                   |                                                               |                  |                    |
|-------------------|---------------------------------------------------------------|------------------|--------------------|
| Piston Size       | $\phi 30.23\text{mm} \times 2 + \phi 33.96\text{mm} \times 2$ |                  |                    |
| Piston Area       | $16.2\text{cm}^2 \times 2$                                    | 'PL' Dimension   | 42.3mm             |
| Piston Material   | Aluminum Alloy                                                | Caliper Body     | 2 pieces           |
| Disc Diameter     | $\phi 320(\text{MAX})\text{mm}$                               | Caliper Material | Aluminum Alloy CNC |
| Disc Thicknesses  | 3.5(MIN)~5(MAX)mm                                             |                  |                    |
| Weight(Less Pads) | 0.67kg                                                        |                  |                    |
| Hydraulic Threads | M10*1.25                                                      |                  |                    |
| Mounting          | Axial(Lug)                                                    |                  |                    |
| - centres         | 40mm                                                          |                  |                    |
| - offset          | 26.5mm                                                        |                  |                    |
| - threads         | M10*1.25                                                      |                  |                    |

## PAD FAMILY(59-110)




Pad Area= $21.56\text{cm}^2$

Pad Depth=33.8mm

Pad Thickness - Organic=8.5mm(plate thickness 3mm)

- Sintered=8mm(plate thickness 3.2mm)

Pad Weight =0.24kg(2 pieces)

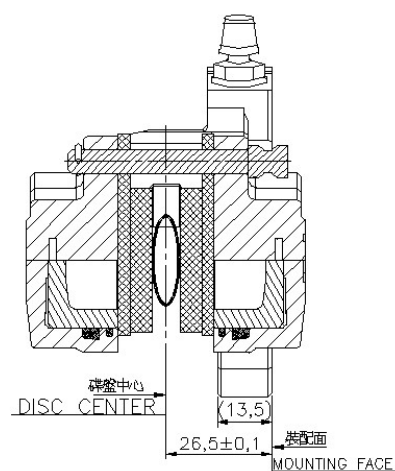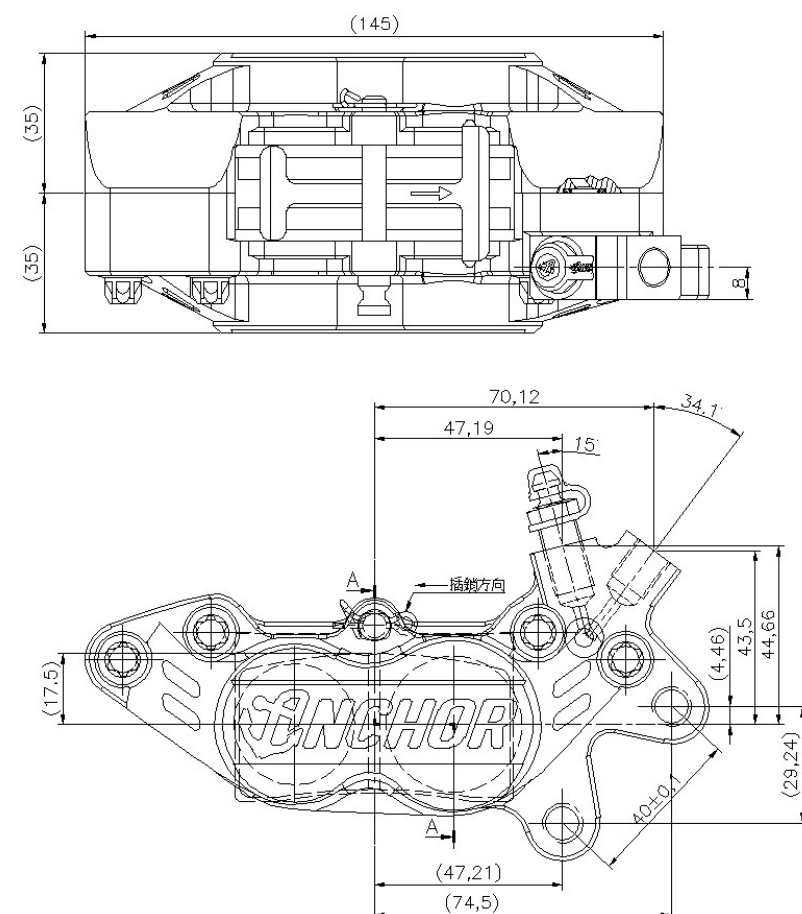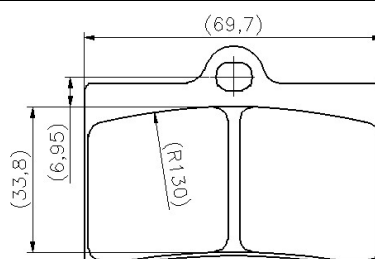

unit:mm



泓輔企業股份有限公司

Horng Fuu Industrial CO.,LTD.