

TECHNICAL SPECIFICATION



Piston Size	$\phi 38.18\text{mm} \times 2 + \phi 42.85\text{mm} \times 2$; $\phi 33.96\text{mm} \times 4$ (REAR)		
Piston Area	$25.86\text{cm}^2 \times 2$; $18.1\text{cm}^2 \times 2$	'PL' Dimension	55.7mm
Piston Material	Aluminum Alloy	Caliper Body	2 pieces
Disc Diameter	$\phi 330\text{mm} \sim \phi 380\text{mm}$	Caliper Material	Aluminum Alloy Forged
Disc Thicknesses	T:30mm(T28~T32mm)		
Weight(Less Pads)	3.1kg(One side)		
Hydraulic Threads	M10*1.0		
Mounting	Radial		
- centres	152mm		
- offset	47 mm		
- hole ϕ	12.2mm		

**PAD FAMILY(HF4BP)**Pad Area=64.2cm²


Pad Depth=51.2mm

Pad Thickness=15mm(with shim, panel thickness 5.5mm)

Pad Weight =1.88kg(4 pieces)

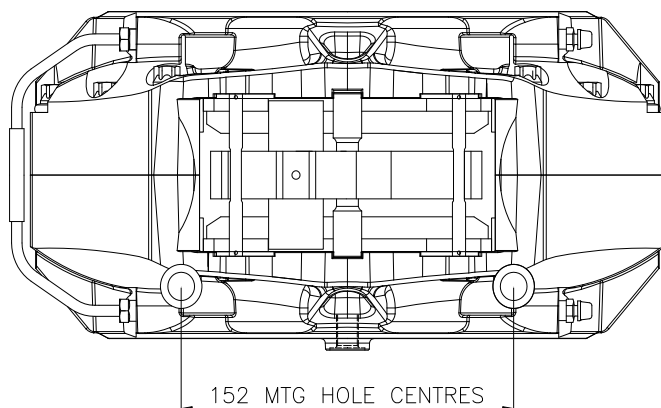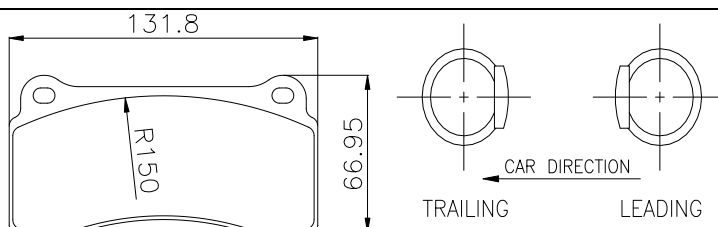

NO	DISC ϕ B/T	ϕ A	ϕ B	ϕ C	ϕ D	E	F	G	H
1	$\phi 330/30$	382.3	330	276.8	211.21	108.3	47	93.6	116
2	$\phi 355/30$	401.3	355	301.8	235.62	120.8	47	93.6	116
3	$\phi 380/30$	428.2	380	328.8	262.08	134.3	47	93.6	116

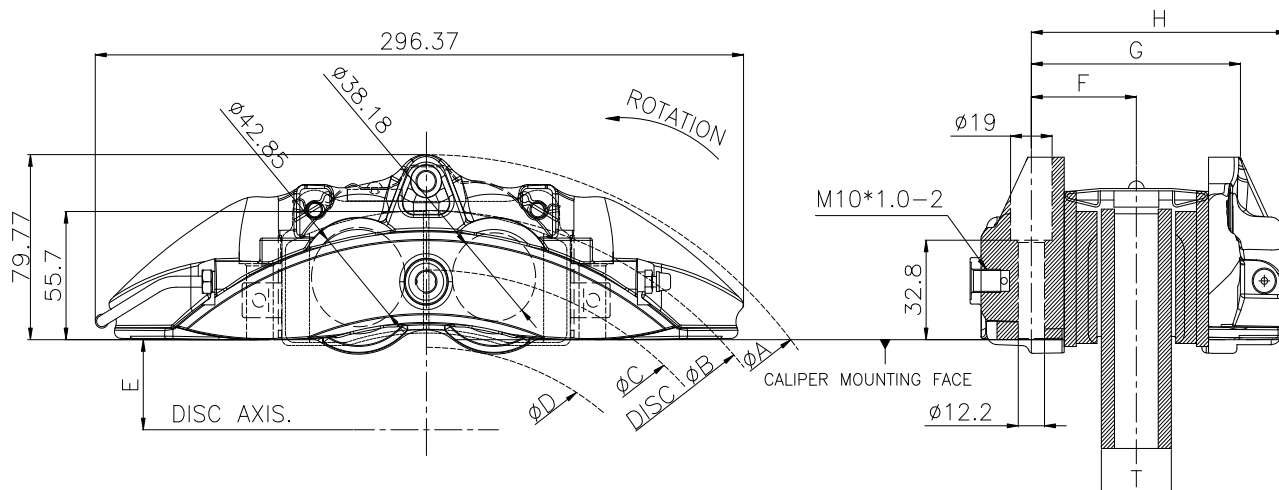

泓輔企業股份有限公司

Horng Fuu Industrial CO.,LTD.

<http://www.horngfuu.com.tw>

E-mail: sa2@horngfuu.com.tw

TEL: +886-3-371-0789

FAX: +886-3-371-0777