

TECHNICAL SPECIFICATION

Piston Size	$\phi 38.18\text{mm} \times 2 + \phi 42.85\text{mm} \times 2$; $\phi 33.96\text{mm} \times 4$ (REAR)		
Piston Area	$25.86\text{cm}^2 \times 2$; $18.1\text{cm}^2 \times 2$ (REAR)	'PL' Dimension	55.25mm
Piston Material	Aluminum Alloy	Caliper Body	2 pieces
Disc Diameter	$\sim \phi 355\text{mm}$	Caliper Material	Aluminum Alloy Forged
Disc Thicknesses	T:24mm(T22~T26m)		
Weight(Less Pads)	2.8kg(One side)		
Hydraulic Threads	M10*1.0		
Mounting	Radial		
- centres	130mm		
- offset	44mm		
- hole ϕ	12.2mm		




PAD FAMILY(HF4CP)

Pad Area=59cm²



Pad Depth=46.5mm

Pad Thickness=15mm(with shim, panel thicknes 5.5mm)

Pad Weight =0.85kg(2 pieces)

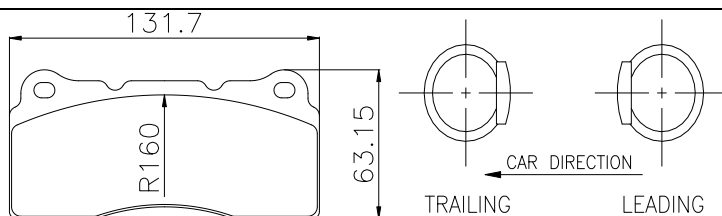

NO	DISC $\phi B/t$	ϕA	ϕB	ϕC	ϕD	E
1	$\phi 290/24$	343.5	290	241.5	186.3	88.7
2	$\phi 355/24$	398	355	303.92	250.76	121.75

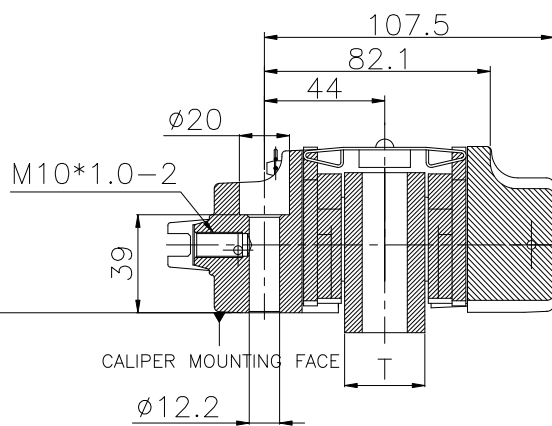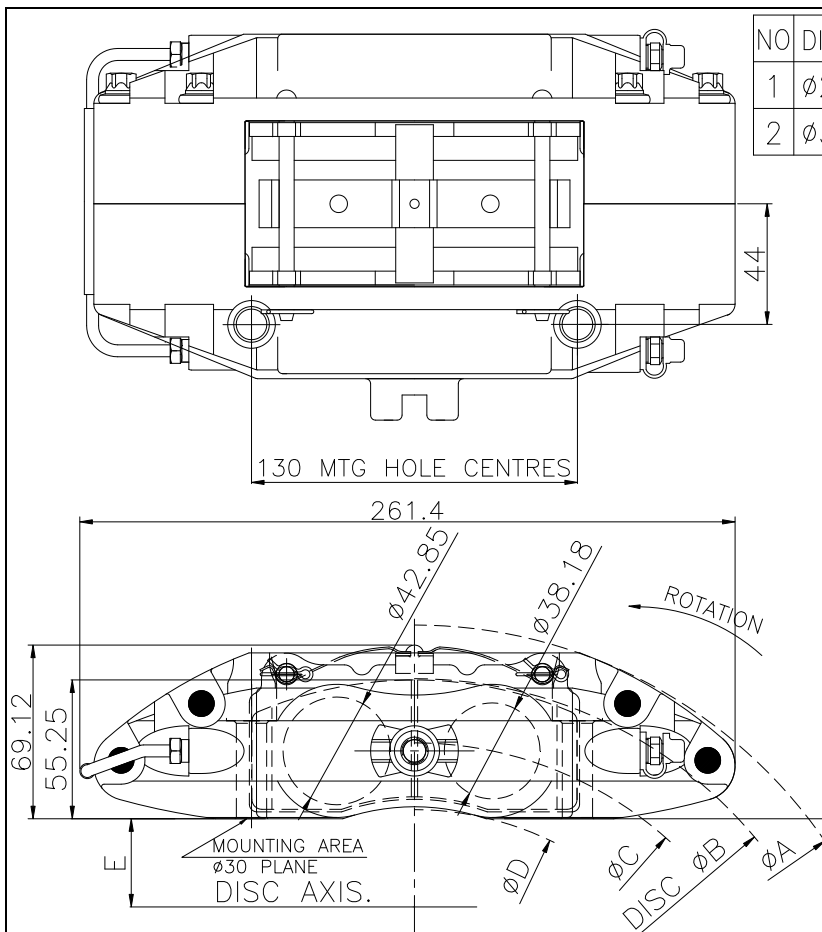

unit:mm



泓輔企業股份有限公司

Hongfuu Industrial CO.,LTD.

<http://www.horngfuu.com.tw> E-mail: sa2@horngfuu.com.tw TEL: +886-3-371-0789 FAX: +886-3-371-0777