

● 6FMP2

TECHNICAL SPECIFICATION

Piston Size	$\phi 30.23\text{mm} \times 2 + \phi 32\text{mm} \times 2 + \phi 32\text{mm} \times 2$		
Piston Area	$23.26\text{cm}^2 \times 2$	'PL' Dimension	46mm
Piston Material	Aluminum Alloy , SUS	Caliper Body	2pieces
Disc Diameter	ϕB	Caliper Material	Aluminum Alloy Forged
Disc Thicknesses	T:24mm(T22~T25mm)		
Weight(Less Pads)	1.85kg(One side)		
Hydraulic Threads	M10*1.0		
Mounting	Radial		
centres	160mm		
offset	26.5mm		
hole ϕ	10.1mm		




PAD FAMILY(HF4CMP1)

Pad Area=47.3cm²


Pad Depth=45mm

Pad Thickness=13.5mm(with shim, panel thicknes 5.5mm)

Pad Weight =0.68kg(2pieces)

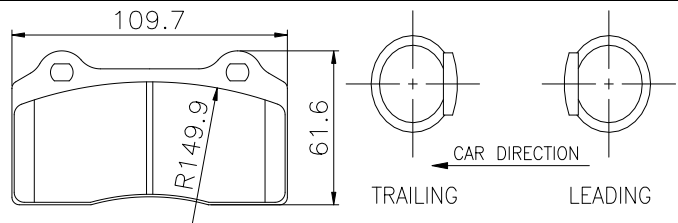

NO	DISC	$\phi B/T$	ϕA	ϕB	ϕC	ϕD	E
1	$\phi 282$	T24	320.1	282	243.28	198.51	93.5
2	$\phi 303$	T24	344.1	303	266.12	221.49	105.5

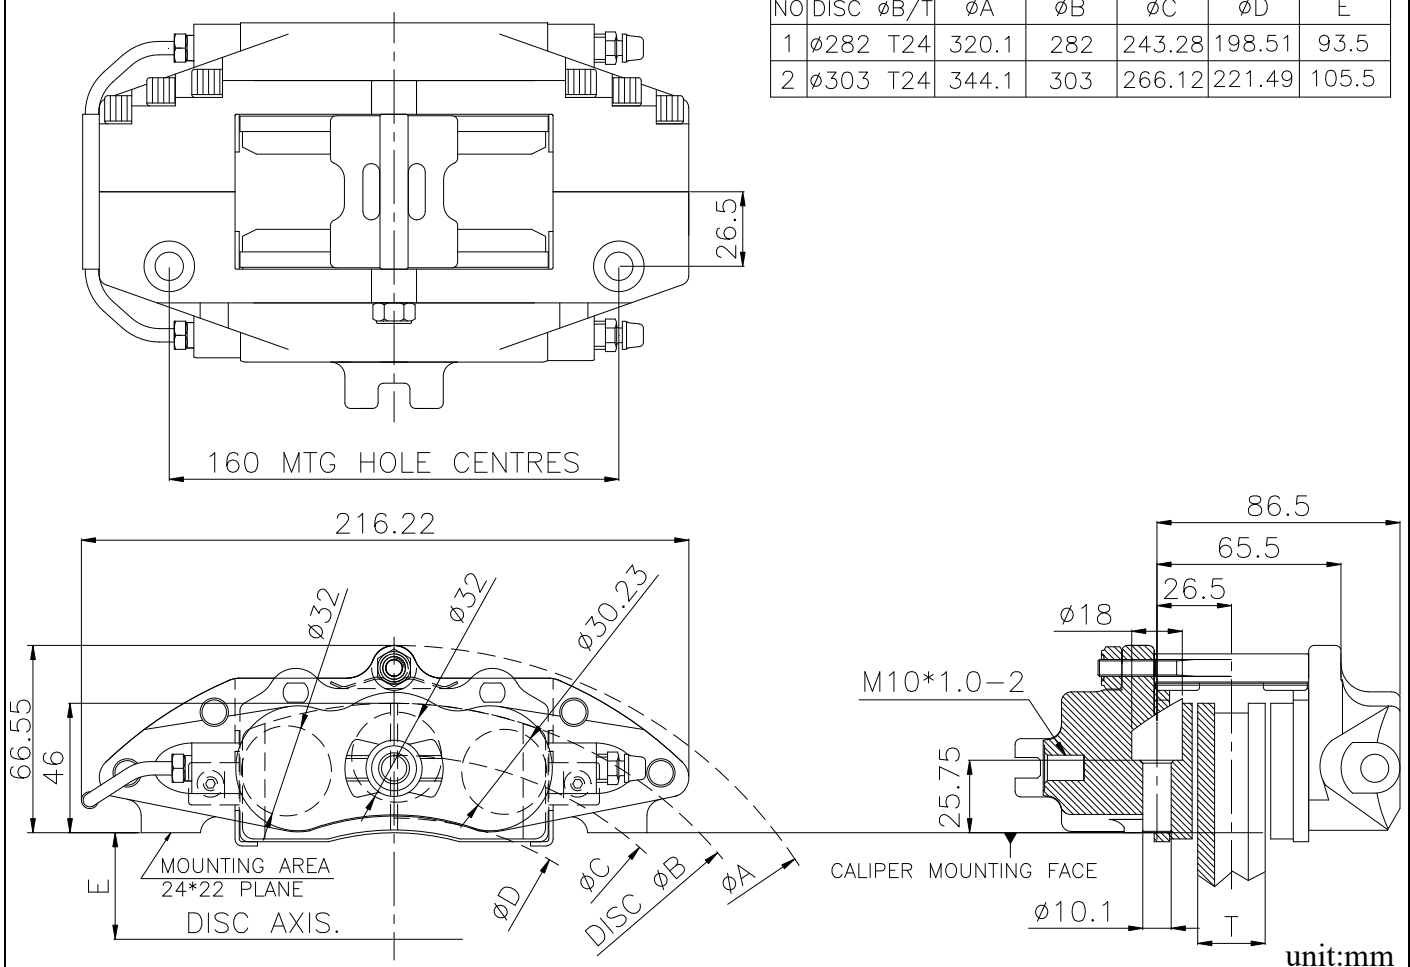

泓輔企業股份有限公司

Horng Fuu Industrial CO.,LTD.

<http://www.horngfuu.com.tw> E-mail: sa2@horngfuu.com.tw TEL: +886-3-371-0789 FAX: +886-3-371-0777